




1. TruTherm-FSC-E80

2. 11R20

3. HG60

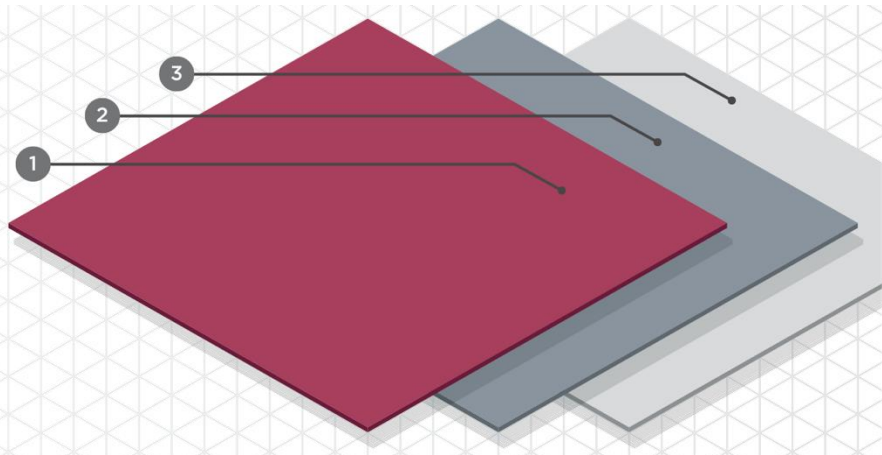

Facestock

An economy thermal paper with standard sensitivity and resistance and suitable for print speeds of up to 250mm/s. Its end uses are self-adhesive labels, vouchers and receipts.

| | | |
|----------------------------------|----|---------|
| Basis weight (g/m ²) | 70 | ISO 536 |
| Caliper (µm) | 78 | ISO 534 |

Adhesive

11R20 is a removable, acrylic-based, pressure sensitive adhesive (PSA). The adhesive is removable from a variety of substrates including metal, glass, PE and PP

| | | |
|--------------------------|----------------|-------------|
| Loop Tack (N/25mm) | 7 | FINAT No. 9 |
| Peel adhesion (N/25mm) | 4 | FINAT No. 1 |
| Minimum application temp | 5°C | |
| Service temperature | -10°C to +70°C | |

Release liner

A super calendared honey glassine, silicone coated one side

| | | |
|----------------------------------|----|----------|
| Basis weight (g/m ²) | 55 | ISO 536 |
| Caliper (µm) | 48 | ISO 534 |
| Transparency (%) | 50 | ISO 2469 |

Conversion and Printing

Direct thermal paper. Suitable for aqueous, flexographic inks. Not suitable for solvent-based inks. It is strongly advised that any ink system is tested prior to use.

Our Warranty

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22°C and 50% RH.