




1. Truvellum 70

2. 11F20

3. HG60

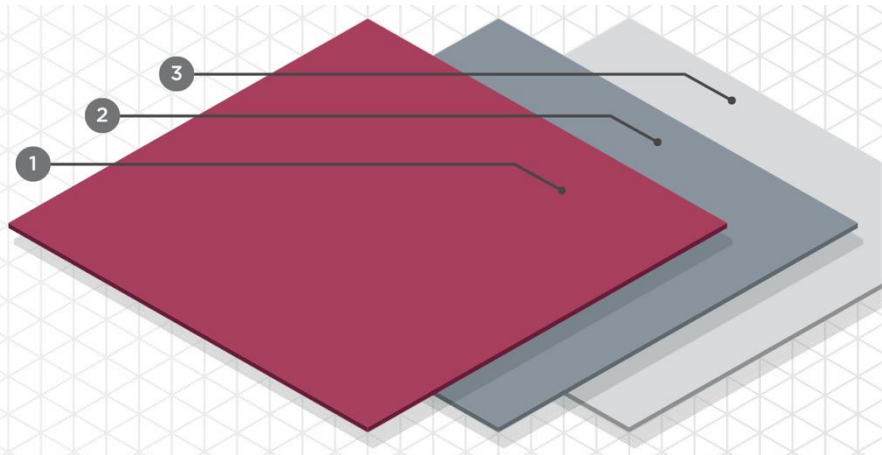

Facestock

A high white, smooth face paper. A general multipurpose label paper; especially suitable for thermal transfer printing.

Basis weight (g/m ²)	70	ISO 536
Caliper (μm)	70	ISO 534
CIE Whiteness	137	ISO 11475:2017

Adhesive

11F20 is a deep freeze permanent sensitive adhesive (PSA). This adhesive should be used when very good adhesion to low temperatures is necessary. Adhesion to low energy surfaces is very good.

Loop Tack (N/25mm)	10	FINAT No. 9
Peel adhesion (N/25mm)	10	FINAT No. 1
Minimum application temp	-20°C	
Service temperature	-40°C to +60C	

Release liner

A super calendared honey glassine, silicone coated one side

Basis weight (g/m ²)	55	ISO 536
Caliper (μm)	48	ISO 534
Transparency (%)	50	ISO 2469

Conversion and Printing

Suitable to be used with a variety of printing techniques. Including thermal transfer, flexographic, screen and litho.

Our Warranty

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22C and 50% RH.