


LABELSTOCK TRUFILM GLOSS CLEAR TC PP60/11F14/PP50



1. Trufilm Gloss Clear PP60

2.11F14

3. Clear PP50

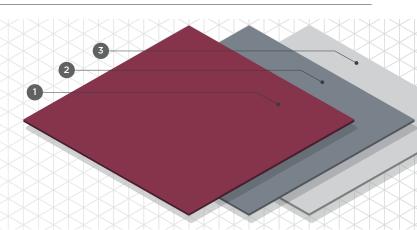

Facestock

A top coated clear, food contact compliant polypropylene with superior print and foil performance.

Caliper (µ)	60	ISO 534
Optical Gloss (%)	90	ASTM D 2457

Release liner

A clear polypropylene designed for release liner applications with excellent conversion properties and high dimensional stability.

Caliper (µ)	50	ISO 534
-------------	----	---------

Conversion and Printing

The trufilm Gloss Clear PP60 is suitable for a wide range of printing techniques including flexography, gravure, letterpress, offset and screen. It is also suitable for foiling. The mechanical properties of this film permit superior registration, matrix stripping and high-speed label dispensing.

Adhesive

11F14 is a deep freeze permanent pressure sensitive adhesive (PSA). This adhesive should be used when very good adhesion at low temperatures is necessary. Adhesion to low energy surfaces is very good.

Loop Tack (N/25mm)	10	FINAT No 9 (glass)
Peel adhesion (N/25mm)	4	FINAT No 1 (glass)
Minimum application temp	-20°C	
Service temperature	-40°C to +60°C	

Regulatory approval:

The adhesive may stand in direct contact with dry, moist, and such kind of fatty foodstuffs to which a correction factor of at least 4 according to the commission regulation (EU) No. 10/2011. Furthermore, it may be safely used for the labelling of blood bags (DIN EN ISO 3826-1). The adhesive is compliant to FDA 175.105

Our Warranty

Our Warranty
The technical infonnation, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a Director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22°C and 50% RH.

