




1. Trutherm FSC T80

2. 11F20

3. HG60

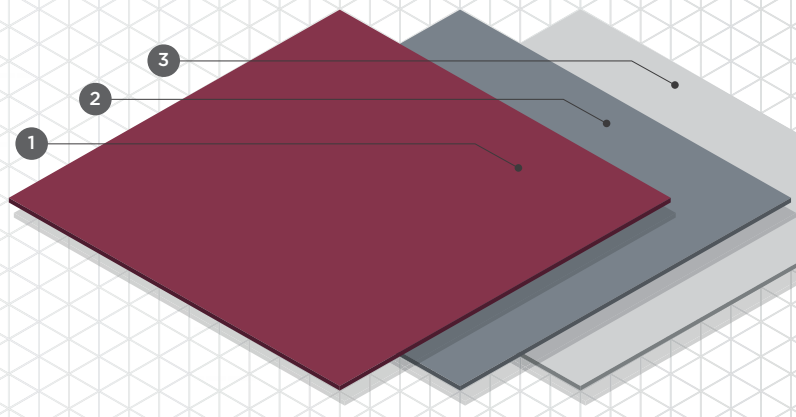

Facestock

A white, top coated direct thermal paper with standard sensitivity and good resistance. It is capable of printing speeds of 200 mm/s. It is suitable for self-adhesive labels, parking tickets and travel tickets.

Basis weight (g/m ²)	73	ISO 536
Caliper (μ)	72	ISO 534
Opacity (%)	85	ISO 2471

Release liner

A super calendared honey glassine, silicone coated one side.

Basis weight (g/m ²)	57	ISO 536
Caliper (μ)	52	ISO 534
Transparency (%)	47	DIN 53147

Conversion and Printing

Suitable to be used with a variety of printing techniques, including flexographic, screen and litho.

Adhesive

11F20 is a deep-freeze permanent pressure sensitive adhesive (PSA). This adhesive should be used when very good adhesion at low temperatures is required. Adhesion to low energy surfaces is very good.

Loop Tack (N/25mm)	10	FINAT No 9 (glass)
Peel adhesion (N/25mm)	10	FINAT No 1 (glass)
Minimum application temp	-20°C	
Service temperature	-40°C to +60°C	

Regulatory approval:

The adhesive may stand in direct contact with dry, moist and such kind of fatty foodstuffs to which a correction factor of at least 4 can be applied according to the commission regulation (EU) No. 10/2011.

The adhesive is compliant to FDA 175.105

Our Warranty

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a Director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22°C and 50% RH.