




1. Trutherm FSC T80

2. 31R17

3. PT23

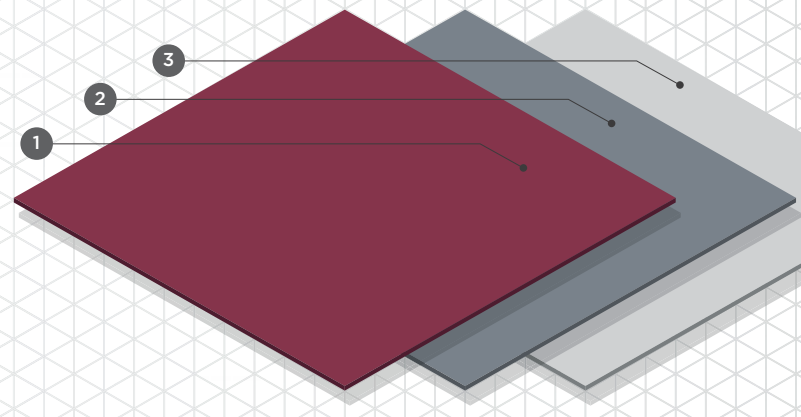

Facestock

A white, top coated direct thermal paper with standard sensitivity and good resistance. It is capable of printing speeds of 250 mm/s. It is suitable for self-adhesive labels, parking tickets and travel tickets.

Basis weight (g/m ²)	76	ISO 536
Caliper (μ)	82	ISO 534
Opacity (%)	85	ISO 2471

Release liner

A transparent polyester film ideally suited for printing, laminating and coating applications. It has excellent dimensional stability over a wide range of temperature.

Basis weight (g/m ²)	32	ISO 536
Caliper (μ)	23	ISO 534
Haze (%)	3	ASTM D-1003

Adhesive

31R is an acrylic pressure sensitive adhesive (PSA) specially formulated to adhere to paper and board, but to also be completely removable and repositionable throughout its lifetime.

Loop Tack (N/25mm)	4	FINAT No 9 (glass)
Peel adhesion (N/25mm)	3	FINAT No 1 (glass)
Minimum application temp	5 °C	
Service temperature	-10 °C to +70 °C	

Conversion and Printing

Suitable to be used with a variety of printing techniques, including flexographic, screen and litho.

Our Warranty

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a Director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22 °C and 50% RH.