



PRODUCT INFO

Designed for the intricate decoration of toys and models, this transfer paper is used globally by key toy manufacturer brands and inclusion in model kits. Supports high quality printing from the smallest micro decal to large-scale decoration requirements. Blue tinted versions are available when white is incorporated into the design, allowing the exact detail to be easily seen.

Features

- Tested to conform to European Toy Safety Standard EN71 part 3
- Non toxic coatings


Benefits

- High quality decoration
- Compatible with non toxic inks
- Decal paper safety guaranteed

Products

Product Name	Smoothness	Dimensional Stability	Backcoated	Metallic Inks	Base Colour	Application method	Format	Print Options
truca [®] plus	••	••	No	••	White Blue	Waterslide	Sheets	Screen Litho Offset
truca [®] advantage	•	••	No	••	White Blue	Waterslide	Sheets	Screen Litho Offset
Decafix	••	••	No	••	Blue	Waterslide	Sheets	Screen Litho Offset

1. Printing a toy, model decal

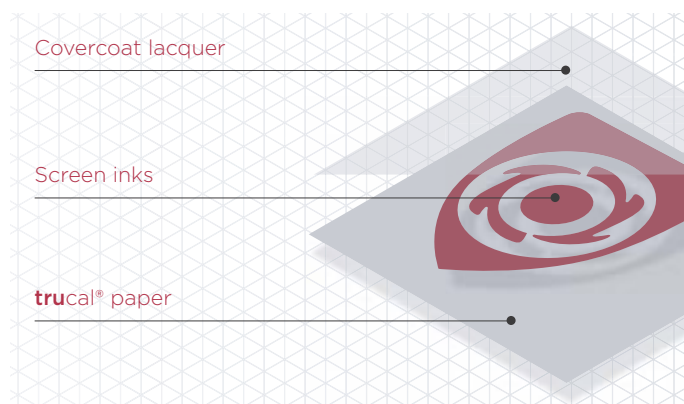

- a. The ink is printed by screen onto the gummed side of **truca!®** paper.
- b. A lacquer covercoat made of resin, plasticiser and solvent, is then screen printed, covering the whole printed design. This allows the entire design to be removed from the decal paper when soaked in water.

Decal Application

- Decals are best released in clean, warm water.
- Sheets should be soaked individually so that water can fully penetrate the paper.
- The wetted sheets can then be stacked on top of each other to await application.
- It is not recommended to leave the printed sheets in water for too long, as the decals will float off. This will hinder application.
- Once the decal is released, any traces of air or water between the decal and ware must be removed. This is best performed with a rubber squeegee.
- Ware must be allowed to dry for several hours to allow the residual water to evaporate.
- To improve the permanence of the applied design, the toy or model can either be stoved or over sprayed with a suitable lacquer.

Getting the best from truca!® decal papers

Storage

- Store unopened packets in ambient conditions.
- We recommend that unopened packets of the paper are stored in the print room for four days prior to opening and printing. This will acclimatise the paper to the print room environment.
- Do not open the packets until printing is about to commence.
- For best results, reseal any part used packets before storage to prevent wavy edges.

Preparing for Printing

- The paper can be provided, at different intersheet humidities to suit the printing conditions of all our customers.
- If the intersheet humidity of the paper matches the ambient relative humidity of the print room, there should be no contraction or expansion of the paper sheets.
- Should your print room conditions be outside the intersheet humidity of the paper, the paper can still be printed acceptably. It is recommended that for precise registration printing, that the paper should be preconditioned to the print room before printing.

Drying

- It is recommended that ambient conditions are used to dry the paper.
- Any form of forced drying without adding moisture will lead to a drop in humidity and a moisture loss from the paper. This can cause shrinking of the sheets resulting in miss register.

Technical

- Our technical experts will provide you advice on inks and covercoats, which are used with **truca!®** paper to ensure you achieve the best printing and application results.

We look forward to hearing from you!