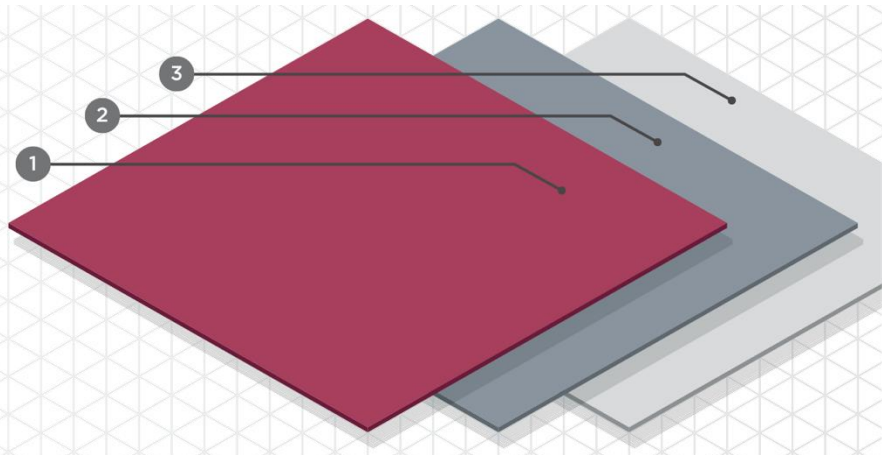



1. Trudigital® PP Gloss White 90
2. 31P20
3. WG60

Facestock

A white gloss inkjet polypropylene for high definition water-based inkjet printing.

Basis weight (g/m ²)	72	ISO 536
Caliper (µm)	90	ISO 534

Adhesive

31P20 combines good peel strength and initial tack with extended shear resistance and finds use in a wide range of applications where permanent bonds are required.

Loop Tack (N/25mm)	10	FINAT No. 9
Peel adhesion (N/25mm)	10	FINAT No. 1
Minimum application temp	10°C	
Service temperature	10°C to +50C	

Release liner

A super calendared white glassine, silicone coated one side.

Basis weight (g/m ²)	60	ISO 536
Caliper (µm)	53	ISO 534
Transparency (%)	49	ISO 2469

Conversion and Printing

Specially formulated for use with all common commercial high-speed inkjet printing systems.

Our Warranty

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22C and 50% RH.