




**1. TruTherm-FSC-T80**

**2. 11P20**

**3. HG60**

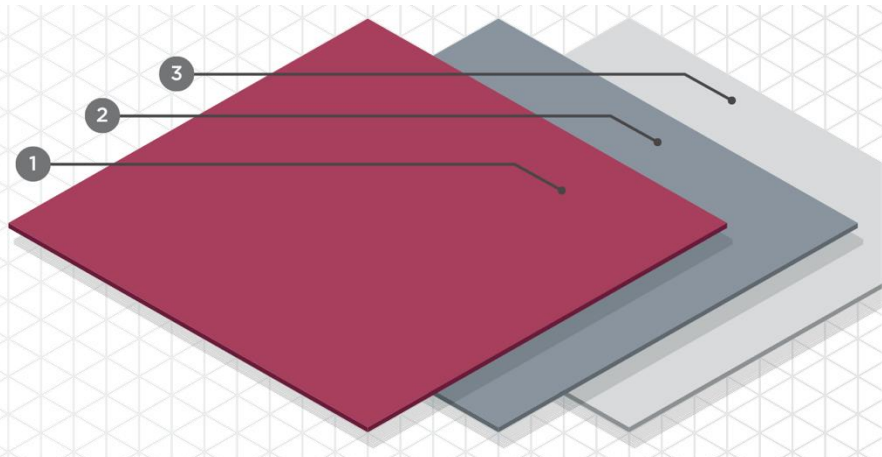

**Facestock**

A white, top coated direct thermal paper with standard sensitivity and good resistance. It is capable of printing speeds of 200 mm/s. This paper contains phenol-free chemistry.

Basis weight (g/m <sup>2</sup> )	72	ISO 536
Caliper (µm)	72	ISO 534
Opacity (%)	85	ISO 2471

**Adhesive**

11P20 is a tackified, acrylic pressure sensitive adhesive (PSA). Engineered to have high tack value to both high and low energy surface substrates.

Loop Tack (N/25mm)	12	FINAT No. 9
Peel adhesion (N/25mm)	12	FINAT No. 1
Minimum application temp	0°C	
Service temperature	-20°C to +60°C	

**Release liner**

A super calendared honey glassine, silicone coated one side

Basis weight (g/m <sup>2</sup> )	55	ISO 536
Caliper (µm)	48	ISO 534
Transparency (%)	50	ISO 2469

**Conversion and Printing**

Suitable to be used in thermal printing applications for standard print speed up to 200mm/s.

**Our Warranty**

The technical information, recommendations and statements are based on data believed to be reliable but do not constitute a guarantee or warranty. The information is given without legal responsibility. The customer should test under own condition to ensure the product is suitable for their own requirements. Tullis Russell products are warranted to be free of defects in material for a period of up to one year from the date of shipment. Tullis Russell will not be responsible for claims beyond the replacement value of the defective product nor in any way be liable or responsible for consequential or incidental damages. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tullis Russell. Other warranty, express or implied, or whether of merchantability or fitness for a particular use or otherwise, shall be excluded. Shelf life: 12 months at 22°C and 50% RH.